





Tremec TR-3160 BG Syncro Shift II Instructions

Please use read, understand the supplied instructions and reference these instructions. **For Transmissions not equipped with oil coolers simply fill to just below the fill hole using the supplied dipstick to check the level.**

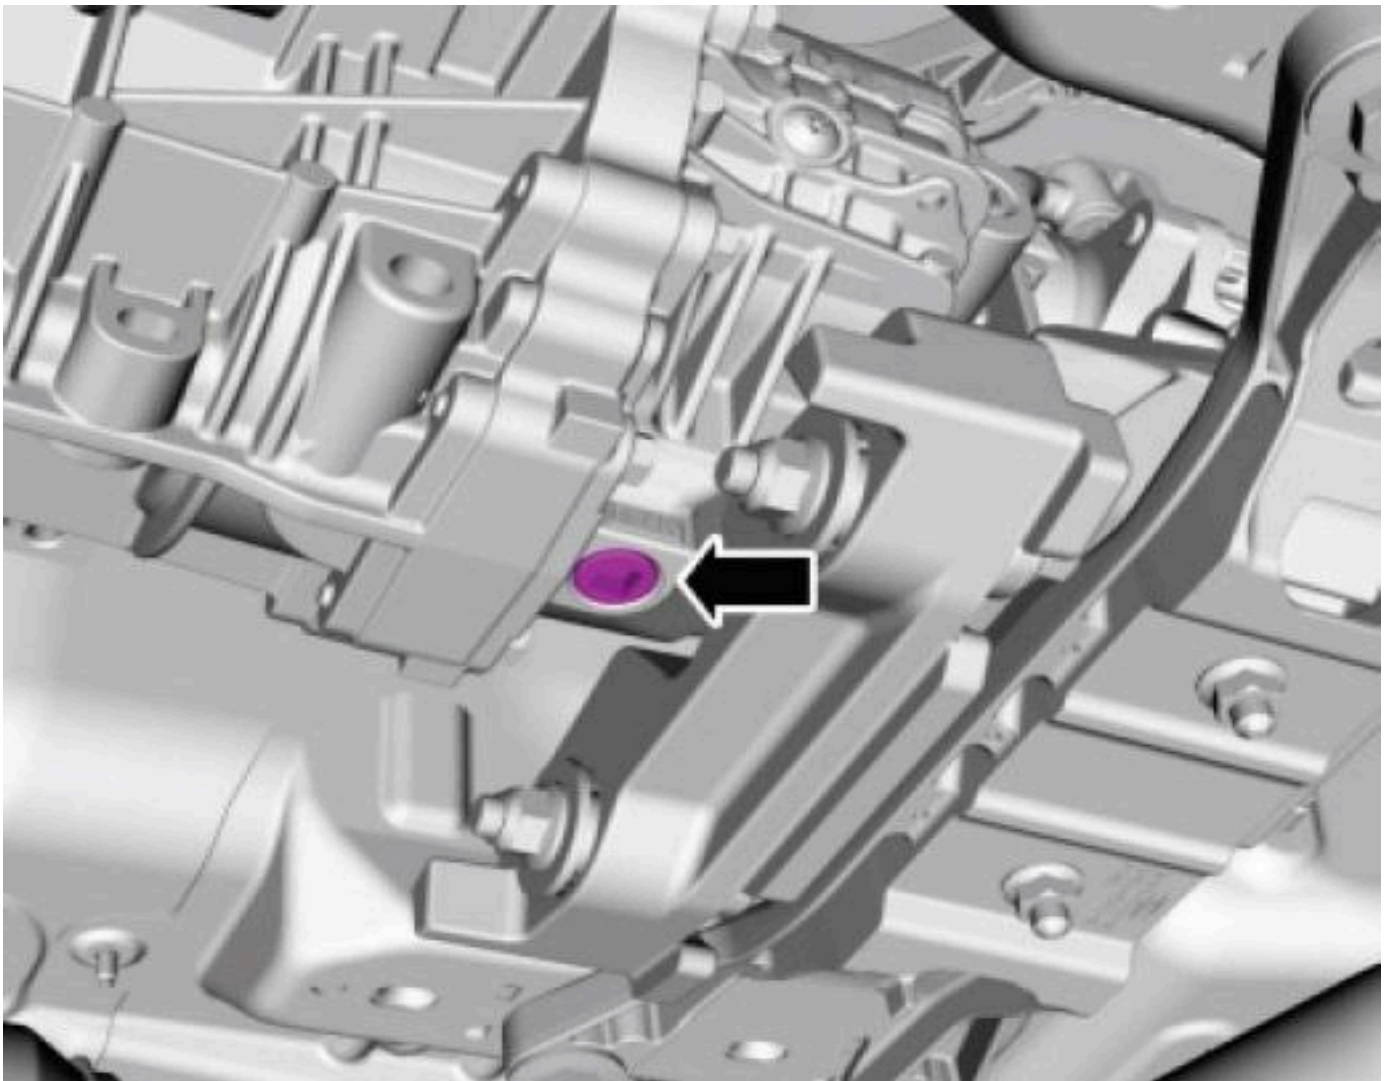

Transmission Drain Plug Location. Use a 3/8" Drive Extension to remove.

Once fluid is completely drained, inspect and clean the drain plug. Apply supplied sealing tape to drain plug and reinstall to 21ft/lbs. or using firm pressure. **Do not over tighten!**

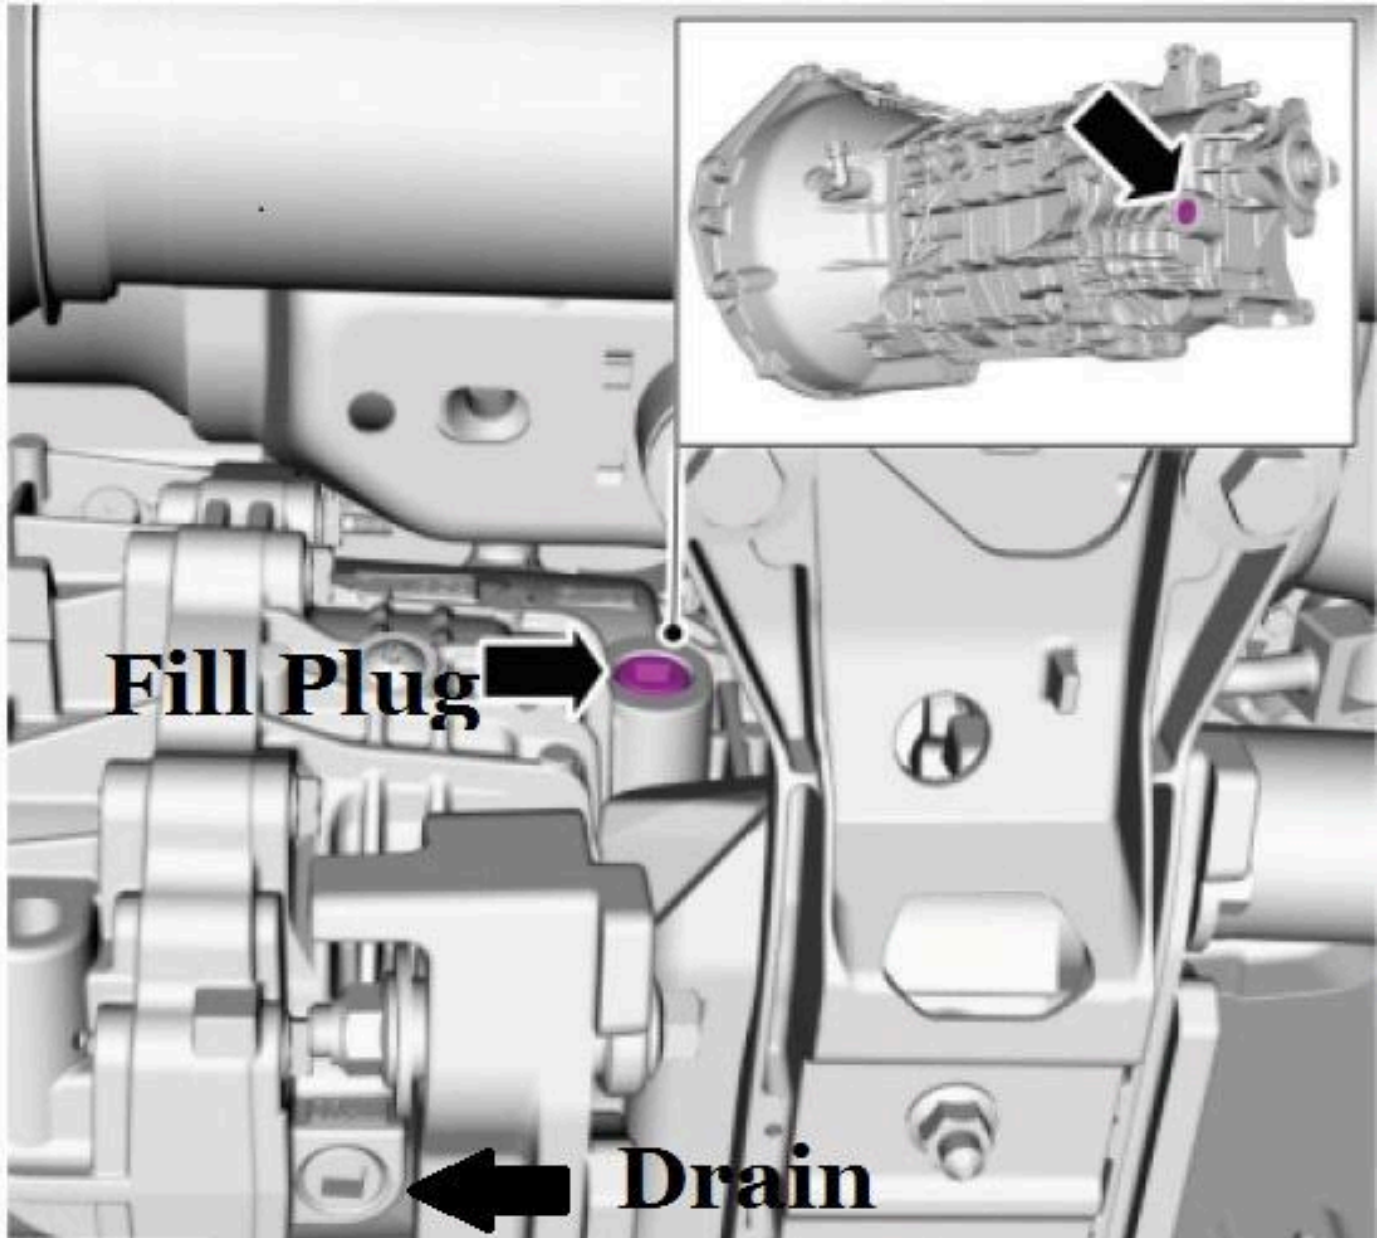

Fill Plug on Drivers Side of Transmission. Use a 3/8" Drive Ratchet to remove.

Assemble pump on to the bottle and feed hose into the fill plug hole. It is difficult due to available clearance but make sure the hose is securely in the fill hose. Proceed to pump oil into transmission until oil just begins to come out of the fill the hole. Clean and inspect fill plug and apply supplied sealant tape and install to 21ft/lbs. or with firm pressure. **Do not over tighten!**